



**Multiple configurations:**

- 2 x Storz B or C  
Option: third Storz B or C
- Stainless steel upper barrel  
Option: with Storz A
- Below ground DN 80 or DN 100
- Single or double shut-off
- With or without traffic break-away design



**NEW  
MULTI HYDRANT  
MODEL N7**

Expect... **AVR**



# AVK MULTI HYDRANT MODEL N7

## Various couplings

- 2 x Storz B or C
- Optional 3rd Storz B or C
- Optional Storz A on DN 100

## With or without traffic break-away design

With traffic break-away design:

- Top and bottom body are connected by 4 hex socket head screws and bushes in stainless steel (optionally bushes in titanium)
- Bushing brakes at impact and top body knocks down
- Bushes and screws available as spare part kit, for easy repair after collision

Without traffic break-away design:

- Bushes in stainless steel according to standard for one-piece hydrants
- Hex head screws

## Single or double shut-off mechanism

Optional ball shut-off:

- Completely rubberized ball sealing
- The ball is filled with a honey comb pattern for maximum durability

## Design and materials




- Designed according to EN 14384 - CE approval 0620-CPR-6122
- Disc coated with abrasion resistant polyurethane for maximum memory effect
- Head of cast iron and upper barrel of stainless steel
- Hydrant head and lower barrel externally epoxy coated to DIN 30677-2 and AVK guidelines  
Hydrant head with a topcoat of UV resistant polyester coating  
Lower barrel internally enamelled to DIN 51178
- Below ground the renowned AVK model P7 design, DN 80 or DN 100

## Drainage

- Drains the water when hydrant is in closed position
- Complete emptying. Below 22 ml of residual water

## Flexdrain® drain packing


- Protection against sand, roots, stones and other impurities
- Ensures unblocked drainage at all times
- Ensures no flushing of surrounding soil

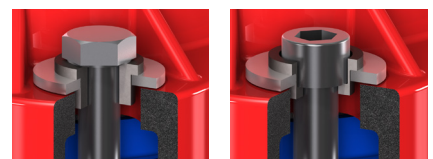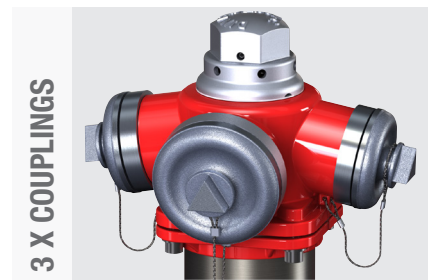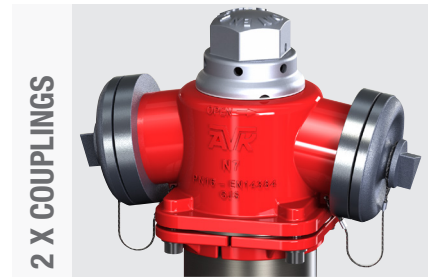

## DOUBLE / SINGLE SHUT-OFF



## DRAINAGE

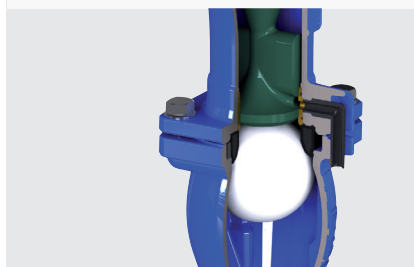

## FLEXDRAIN® DRAIN PACKING



## AVK International A/S

Bizonvej 1  
Skovby  
8464 Galten  
Denmark

Tel.: +45 8754 2100  
Fax.: +45 8754 2120  
sales@avk.dk  
www.avkvalves.eu

2015-06-25  
Copyright©AVK Group A/S 2015

